
i-Optik

NEW



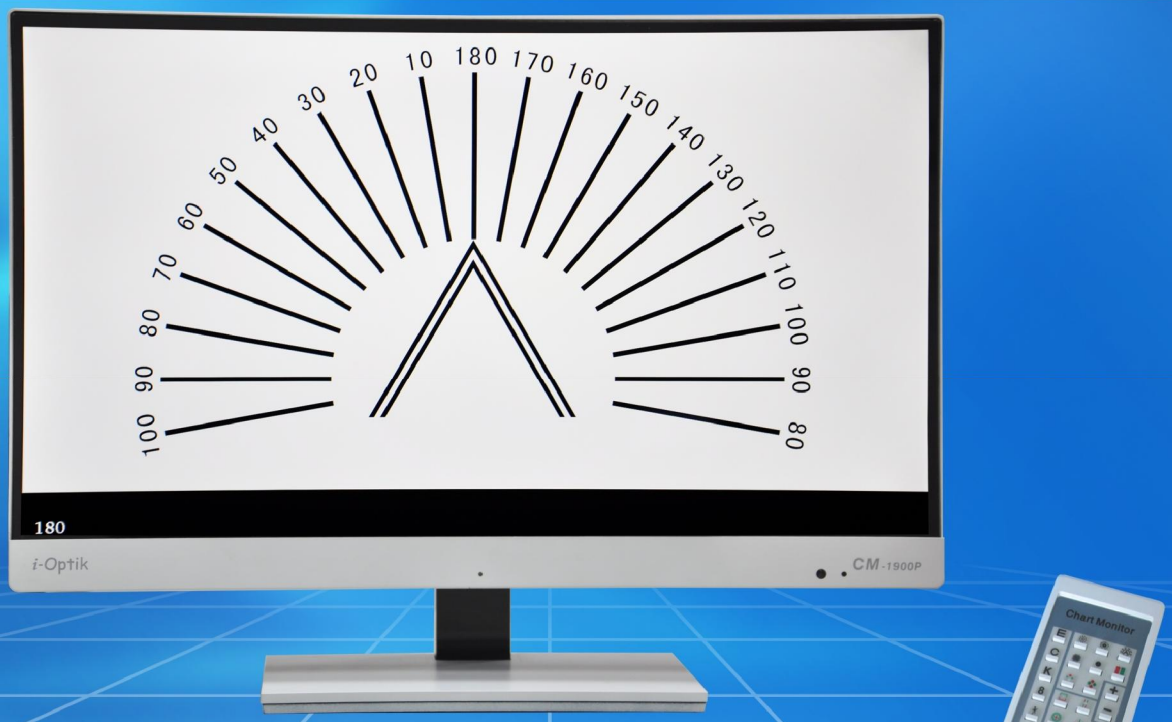

CM–1900C

Flat Screen Monitor Chart


i-Optik

Fast Accurate Steady


CM–1900C

Features


- 23-inch high contrast and bright display
- Smooth and quiet operation
- Wireless Remote control
- Wide range of test types
- Precise distance adjustment
- Easy mounting
- Random test sequence

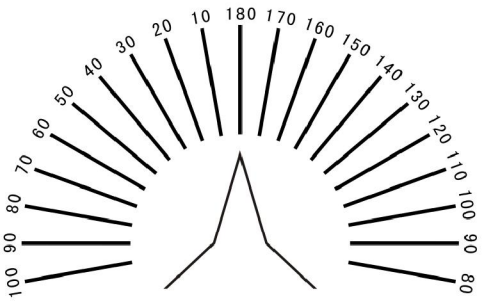

Rotating Astigmatic Fan Chart
Fast and Accurate test for Cylinder and Axis

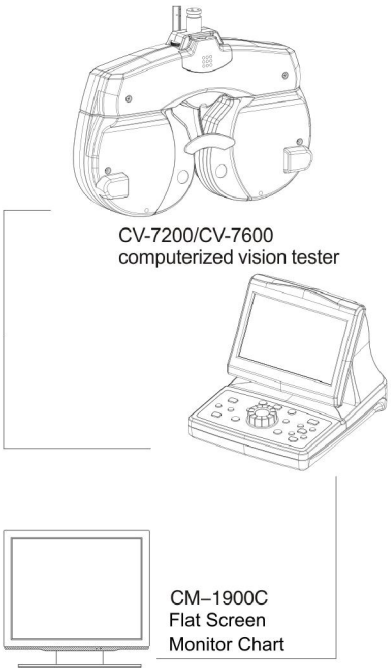

Support data connection with CV-7200/CV-7600 Computerized vision tester

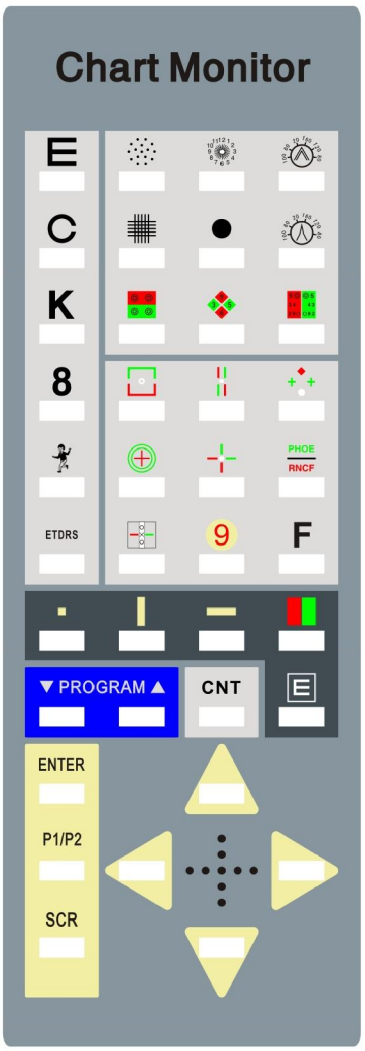

Specifications

Display	23" LCD (color) High resolution Monitor
Brightness	250 cd/m^2
Chart versions	E, C, ABC, 123, child, special version charts
Chart acuity	6/3-6/150 20/10-20/500 0.04-2.0
Distance	2.0 ~ 7.0m
Power supply	Input: AC100–240V, 50/60Hz
Power consumption	≤33W
Dimension	530mm (W) × 390mm(H) × 120mm(D)
Weight	5.5kg (Net. Weight)
Remote	IR
Batteries for remote control	3A